



Everything's Digital


Network Surveillance Solutions

How to Merge Multiple Servers
under 1 EC- Cube

Cube Hardware

- F1 HDD LED
- F2 Power Button / Power LED
- F3 5.25" Bay
- F4 USB 2.0 Port
- F5 Microphone
- F6 Headphone
- F7 USB 2.0 Port

- B1 AC Power Socket
- B2 Kensington Lock
- B3 Serial Port Perforation (optional)
- B4 SPDIF Out Port (optional)
- B5 DVI-I Port (for HDMI)
- B6 DVI-D Port (for analog)
- B7 USB 3.0 Ports
- B8 Microphone Jack
- B9 Line-Out Jack
- B10 Line-In Jack
- B11 LAN & USB 2.0 Ports
- B12 Clear CMOS Button
- B13 USB 2.0 Ports
- B14 Second NIC Card

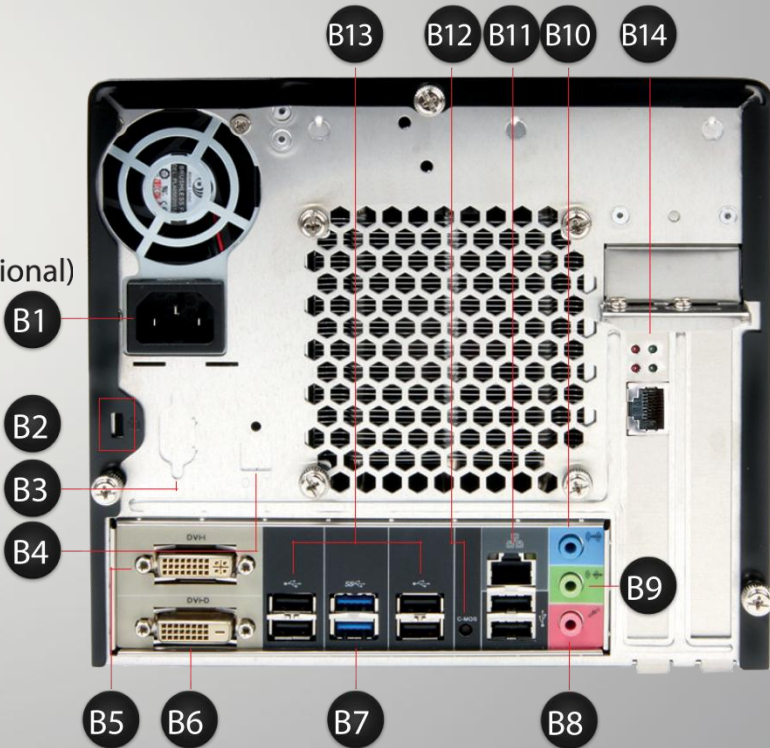


Combining 2 MS under 1 EC

- 1. Select your **PRIMARY** Enterprise Controller
- 2. Find the IP Address & Port Information

Locating your IP address on Windows and Linux

On Linux:

Go to Settings > Network

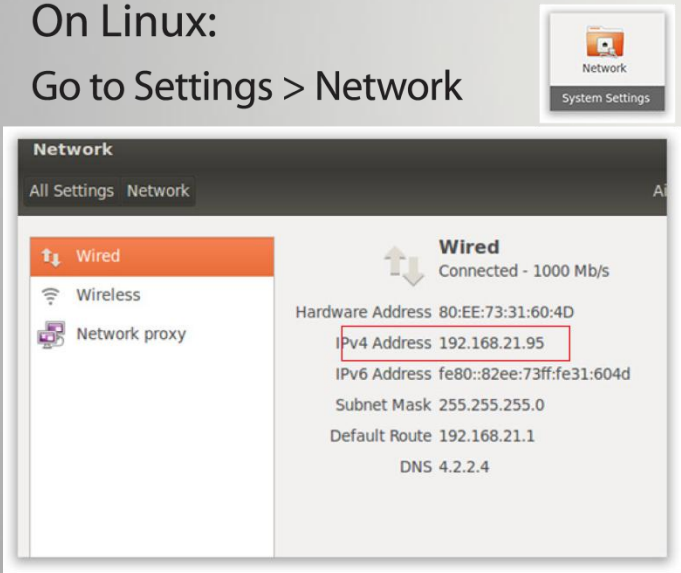


PORTS
7001: Enterprise Controller
7002: HTTP
7003: RTSP
7004: Proxy

On Windows:

Open Network and Sharing Center


Click on LAN or Wireless Connection

Click on "Details"

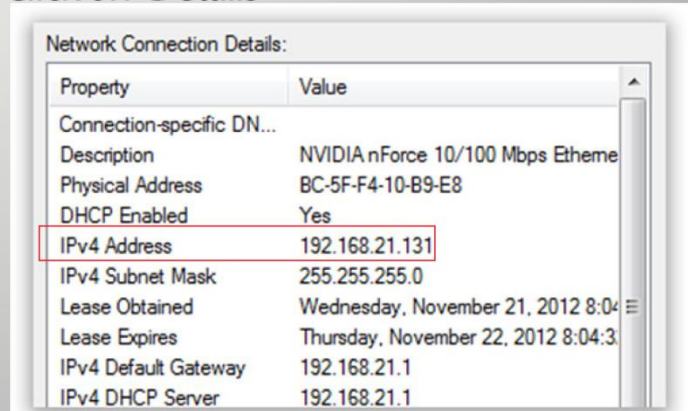

Combining 2 MS under 1 EC- Cube

3. Go to the **PASSIVE** Media Server (Server that would have only the Media Server on it)
 4. Right-click on the tray tool & select settings
- ## Multi-Site VMS - Combining Servers Into 1 Enterprise Controller

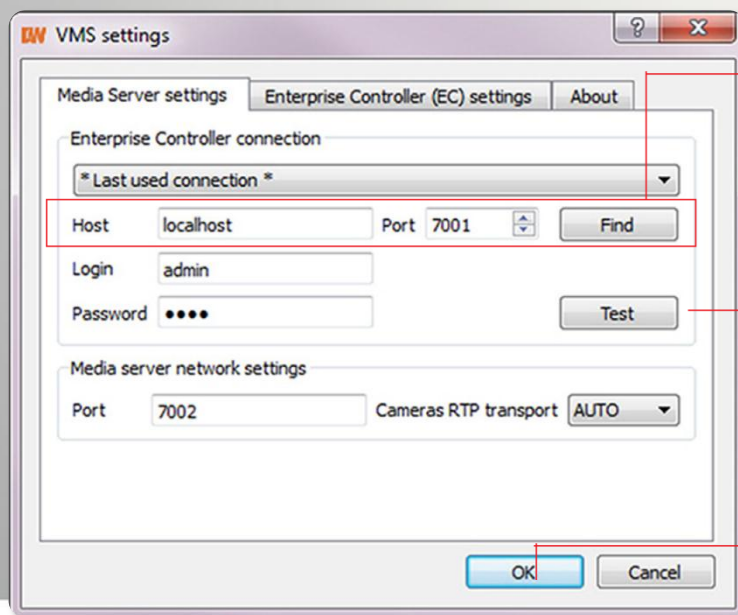

a. Enter primary EC's IP address
port number, User ID and
Password **

b. Click 'Test'

c. Click 'Ok'


**Use the 'Find' button to locate all ECs on your network.

Combining 2 MS under 1 EC- Cube

5. From your Client PC, run the DW Spectrum Software
6. In the login page enter the PRIMARY EC's:
 - a. IP address
 - b. Port
 - c. User
 - d. Password
7. Click 'Test' to verify proper connection
8. Click 'Connect'



Combining 2 MS under 1 EC

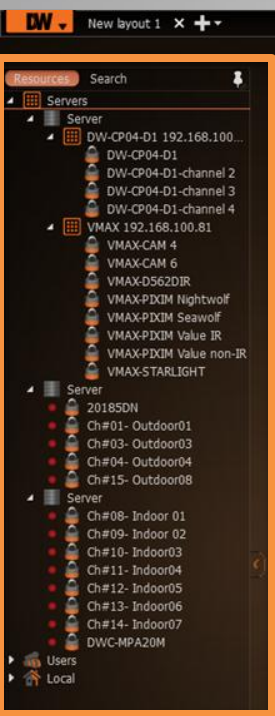

When connecting to the PRIMARY EC, both Media Servers will appear on the Display Tree.

If both Servers are on the same network, you can assign cameras to each server by 'drag-n-drop'

Blackjack

POWERED BY

DW spectrum



Head Office

5436 W. Crenshaw Street, Tampa, FL 33634

Toll Free: 866.446.3595 Fax: 813.888.9262

Sales Office

16220 Bloomfield Ave.

Cerritos, California, USA 90703